

# RICADI


## WLEX35 - WALL PACK



This stylish wall-pack has a die-cast aluminium body and clear polycarbonate diffuser. A durable solution for outdoor applications with IP65 and IK10 ratings. Suitable for BESA box or surface mounting with conduit side entry points. Dimming and emergency options available. Finished in black, white or grey.

### PRODUCT SPECIFICATIONS

|                      |                                      |
|----------------------|--------------------------------------|
| <b>Wattage:</b>      | 13W / 18W / 28W Switchable           |
| <b>Efficacy:</b>     | ~130Lm/W                             |
| <b>CCT:</b>          | 3000K / 4000K / 6500K CCT Switchable |
| <b>CRI:</b>          | >80                                  |
| <b>Driver Type:</b>  | Fixed Output / DALI                  |
| <b>Construction:</b> | Aluminium Body                       |
| <b>Diffuser:</b>     | Clear                                |
| <b>Colour:</b>       | Anthracite / Light Grey              |
| <b>IP Rating:</b>    | IP65                                 |
| <b>IK Rating</b>     | IK10                                 |
| <b>Mounting:</b>     | Surface                              |
| <b>Light Source:</b> | LED                                  |
| <b>LED Lifetime:</b> | 60000/L70                            |
| <b>SDCM:</b>         | 5                                    |

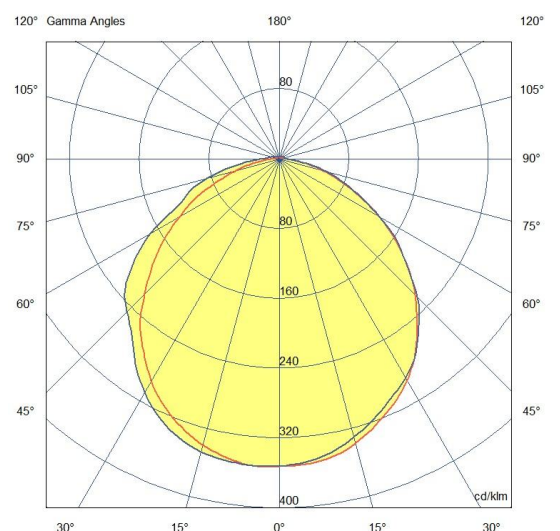

# RICADI

## WLEX35 - WALL PACK

### CODING MATRIX


Use the **BOLD** characters to create your specified code:

| Family        | Dimming        |      | Emergency      |               | Sensor         |           | Colour         |            |
|---------------|----------------|------|----------------|---------------|----------------|-----------|----------------|------------|
| <b>WLEX35</b> | <b>(Blank)</b> | None | <b>(Blank)</b> | None          | <b>(Blank)</b> | None      | <b>(Blank)</b> | Anthracite |
|               | <b>-DA</b>     | DALI | <b>-E</b>      | 3hr           | <b>-PC</b>     | Photocell | <b>-G</b>      | Grey       |
|               |                |      | <b>-EA</b>     | 3hr Auto Test | <b>-MW</b>     | Microwave |                |            |
|               |                |      | <b>-ED</b>     | 3hr DALI      |                |           |                |            |

*This luminaire has selectable outputs and colour temperatures:*

| Power - Lumens | CCT   |
|----------------|-------|
| 13W - 1800lm   | 3000K |
| 18W - 2500lm   | 4000K |
| 28W - 3500lm   | 6500K |

### DIMENSIONAL DIAGRAM

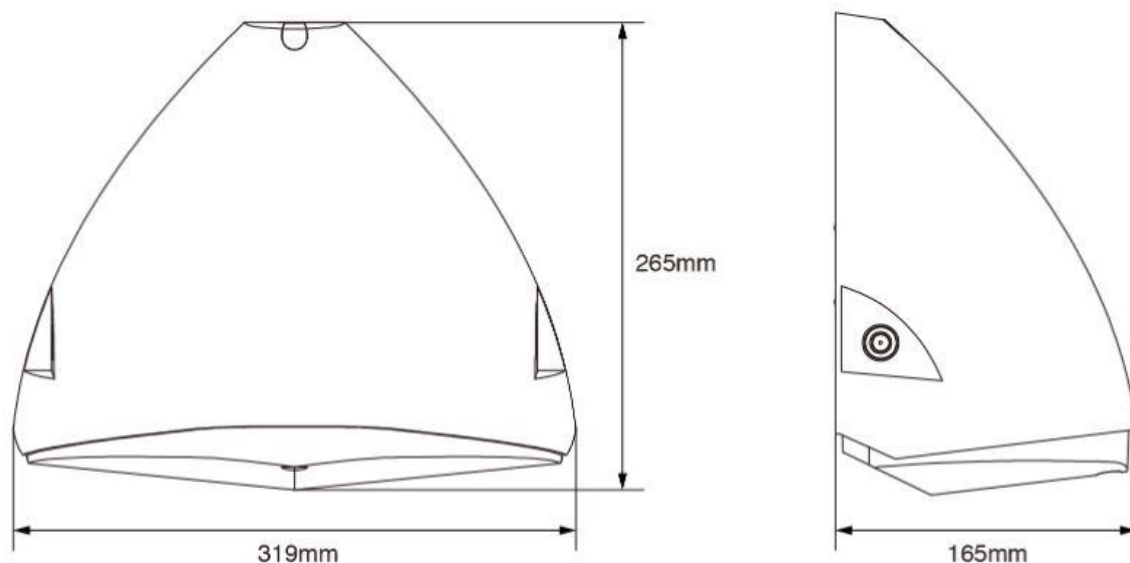

# RICADI

## WLEX35 - WALL PACK

---

