

CYCLONE


BH05 - ROUND BULKHEAD WITH EYELID



The Cyclone bulkhead is IP65 and IK08 rated, an ideal anti-vandal solution for car parks, schools, stairwells and amenity environments etc. Die-cast aluminium body with eyelid louver finished in dark grey with UV-stable polycarbonate diffuser. Emergency & Microwave Sensor options available.

PRODUCT SPECIFICATIONS

Wattage:	10W / 14W
Efficacy:	~55Lm/W
CCT:	3000K / 4000K
CRI:	>80
Driver Type:	Fixed Output / DALI
Construction:	Aluminium Body
Diffuser:	Opal
Colour:	Dark Grey
IP Rating:	IP65
IK Rating:	IK10
Mounting:	Surface
Light Source:	LED
LED Lifetime:	100000/L80B50
SDCM:	3

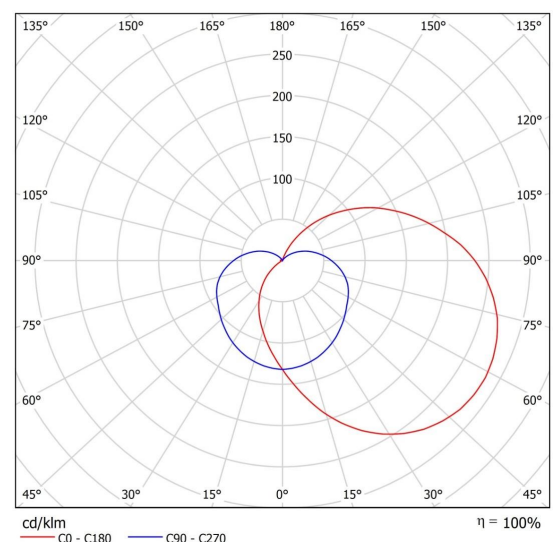

CYCLONE


BH05 - ROUND BULKHEAD WITH EYELID

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Power		Lumens		CCT		Dimming		Sensor		Emergency	
BH05	-10W	10W	582lm		-3K	3000K	(Blank)	None	(Blank)	None	(Blank)	None
	-14W	14W	800lm		-4K	4000K	-DA	DALI	-MW	Microwave	-E	3hr
	<i>(lumens stated are for 4000K)</i>										-EA	3hr Auto Test
											-ED	3hr DALI

DIMENSIONAL DIAGRAM

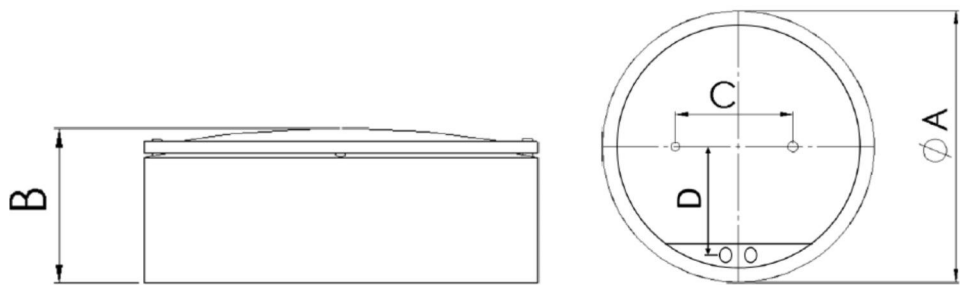

A, mm	B, mm	C, mm	D, mm
360	130	260	135