

PESARO


DL08 - IP65 RECESSED DOWNLIGHT



The Pesaro is a perfect solution for retail and commercial applications. IP65 rating for washroom or external environments. 50° beam angle with silver faceted reflector. Dimming and emergency options available. Finished in white or a colour of your choice.

PRODUCT SPECIFICATIONS

Wattage:	20W / 28W / 42W
Efficacy:	~108Lm/W
CCT:	3000K / 4000K
CRI:	>80
Beam Angle:	50°
Driver Type:	Fixed Output / DALI
Construction:	Aluminium Body
Diffuser:	Tempered Glass
Reflector:	Faceted Silver
Colour:	White / Optional
IP Rating:	IP65
IK Rating:	IK05
Mounting:	Recessed
Light Source:	LED
LED Lifetime:	75000/L80B50
SDCM:	3

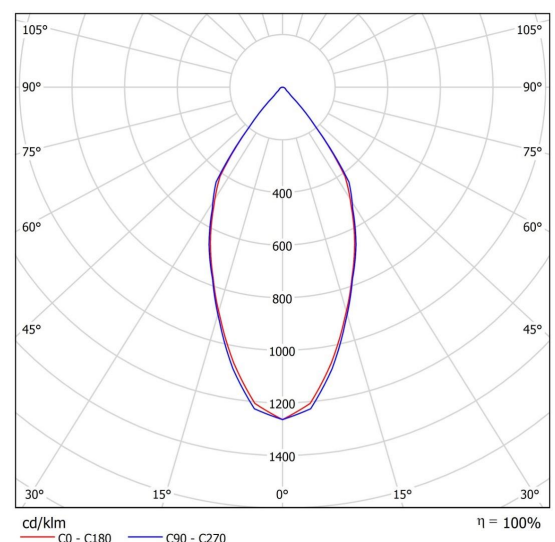

PESARO

DL08 - IP65 RECESSED DOWNLIGHT

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Power		Lumens	CCT		Dimming		Emergency	
DL08	-20W	20W	2251lm	-3K	3000K	(Blank)	None	(Blank)	None
	-28W	28W	3074lm	-4K	4000K	-DA	DALI	-E	3hr
	-42W	48W	4426lm					-EA	3hr Auto Test
	<i>(lumens stated are for 4000K)</i>							-ED	3hr DALI

DIMENSIONAL DIAGRAM

