

## NECTRA


### DL10 - RECESSED PANEL DOWNLIGHT



The Nectra is a low-height, lightweight downlight with opal diffuser. Ideal for use in low and restricted ceiling voids. Designed for corridors and office spaces. Die-cast aluminium body, white finish, spring clip installation. Dimming and emergency options available.

### PRODUCT SPECIFICATIONS

|                      |                                 |
|----------------------|---------------------------------|
| <b>Wattage:</b>      | 6W / 9W / 12W / 15W / 18W / 24W |
| <b>Efficacy:</b>     | ~90Lm/W                         |
| <b>CCT:</b>          | 3000K / 4000K                   |
| <b>CRI:</b>          | >80                             |
| <b>Driver Type:</b>  | Fixed Output / DALI             |
| <b>Construction:</b> | Aluminium Body                  |
| <b>Diffuser:</b>     | Opal                            |
| <b>Colour:</b>       | White                           |
| <b>IP Rating:</b>    | IP44                            |
| <b>IK Rating:</b>    | IK04                            |
| <b>Mounting:</b>     | Recessed                        |
| <b>Light Source:</b> | LED                             |
| <b>LED Lifetime:</b> | 50000/L70B50                    |
| <b>SDCM:</b>         | 3                               |

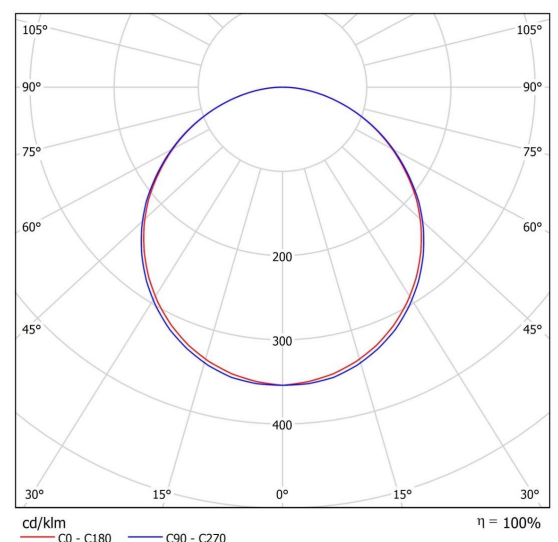

NECTRA


DL10 - RECESSED PANEL DOWNLIGHT

CODING MATRIX

Use the **BOLD** characters to create your specified code:

| Family      | Size                                 |       | Power       |     | Lumens | CCT        |       | Dimming        |      | Emergency      |               |
|-------------|--------------------------------------|-------|-------------|-----|--------|------------|-------|----------------|------|----------------|---------------|
| <b>DL10</b> | <b>-120</b>                          | 120mm | <b>-6W</b>  | 6W  | 465lm  | <b>-3K</b> | 3000K | <b>(Blank)</b> | None | <b>(Blank)</b> | None          |
|             | <b>-145</b>                          | 145mm | <b>-9W</b>  | 9W  | 812lm  | <b>-4K</b> | 4000K | <b>-D</b>      | DALI | <b>-E</b>      | 3hr           |
|             | <b>-170</b>                          | 170mm | <b>-12W</b> | 12W | 1036lm |            |       |                |      | <b>-EA</b>     | 3hr Auto Test |
|             | <b>-190</b>                          | 190mm | <b>-15W</b> | 15W | 1420lm |            |       |                |      | <b>-ED</b>     | 3hr DALI      |
|             | <b>-220</b>                          | 220mm | <b>-18W</b> | 18W | 1685lm |            |       |                |      |                |               |
|             | <b>-295</b>                          | 295mm | <b>-24W</b> | 24W | 2236lm |            |       |                |      |                |               |
|             | <i>(lumens stated are for 4000K)</i> |       |             |     |        |            |       |                |      |                |               |

DIMENSIONAL DIAGRAM

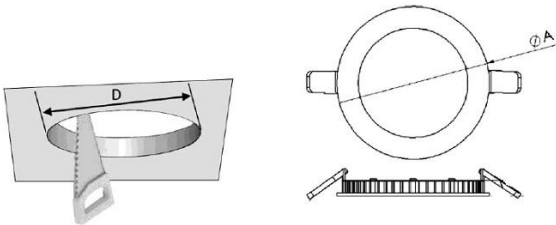

| D, mm | A, mm | Height |
|-------|-------|--------|
| 105   | 120   | 10     |
| 130   | 145   | 10     |
| 155   | 170   | 10     |
| 175   | 190   | 10     |
| 205   | 220   | 10     |
| 280   | 295   | 10     |