

MARLIANA


FL01 - LED FLOODLIGHT



Designed with durability and performance in mind, the Marliana LED Projector range is the perfect choice for many external and security applications. IP65 and IK08 rated for use in adverse conditions, this architectural floodlight has a choice of beam angles: 12°, 30°, 45°, 60°, 90°, asymmetric and 3 street optics. Die-cast aluminium with a dark grey finish and tempered clear impact-resistant glass.

PRODUCT SPECIFICATIONS

Wattage:	34W - 212W
Efficacy:	~115Lm/W
CCT:	3000K / 4000K
CRI:	>70
Beam Angle:	12° / 30° / 45° / 60° / 90° / LSM1 / LSA1 / LSA
Driver Type:	Fixed Output / DALI
Construction:	Aluminium Body
Diffuser:	Tempered Glass
Colour:	Dark Grey
IP Rating:	IP65
IK Rating:	IK08
Mounting:	Surface
Light Source:	LED
LED Lifetime:	100000/L90B10
SDCM:	3

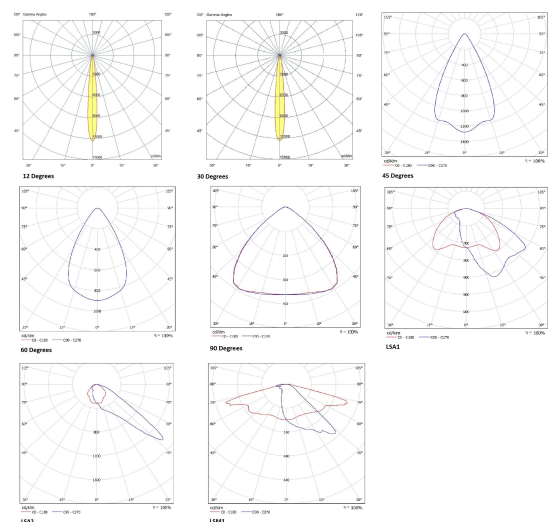

MARLIANA


FL01 - LED FLOODLIGHT

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Size		Power		Lumens	CCT		Dimming		Optics	
FL01	-338	338mm	-34W	34W	4319lm	-3K	3000K	(Blank) None -DA DALI		-LSM1	LSM1
			-53W	53W	6036lm	-4K	4000K			-LSA1	LSA1
	-444	444mm	-69W	69W	8712lm					-LSA2	LSA2
			-106W	106W	12072lm					-12D	12 Degree
	-515	515mm	-132W	132W	15090lm					-30D	30 Degree
			-159W	159W	18108lm					-45D	45 Degree
			-212W	212W	24144lm					-60D	60 Degree
					(lumens stated are for 4000K)					-90D	90 Degree

DIMENSIONAL DIAGRAM

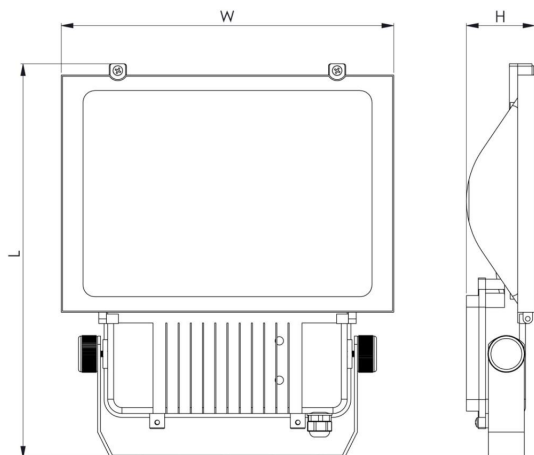

MARLIANA

FL01 - LED FLOODLIGHT

