


ASOLA LN14


LN14 - DIRECT/INDIRECT SUSPENDED LINEAR

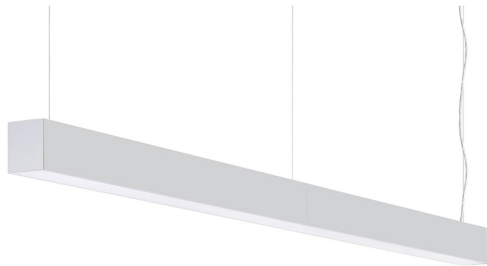

The Asola LN14 is a suspended linear luminaire system. Available with opal or low-glare micro-linear prismatic diffuser. The Asola system can form a continuous line when using the in-line connection kits. Multiple lengths and outputs available with integrated sensor options. Aluminium body finished in black, grey, white or bespoke RAL colour. Through-wiring options and suspension kits supplied.

PRODUCT SPECIFICATIONS

Wattage:	21W - 55W
Efficacy:	~120Lm/W
CCT:	3000K / 4000K / TW
CRI:	>80
Driver Type:	Fixed Output / DALI
Construction:	Aluminium Body
Diffuser:	Opal / MPRZ
Colour:	White / Black / Grey / Optional
IP Rating:	IP40
IK Rating:	IK05
Mounting:	Suspended
Light Source:	LED
IK Rating:	IK05
LED Lifetime:	50000/L80B10
SDCM:	3

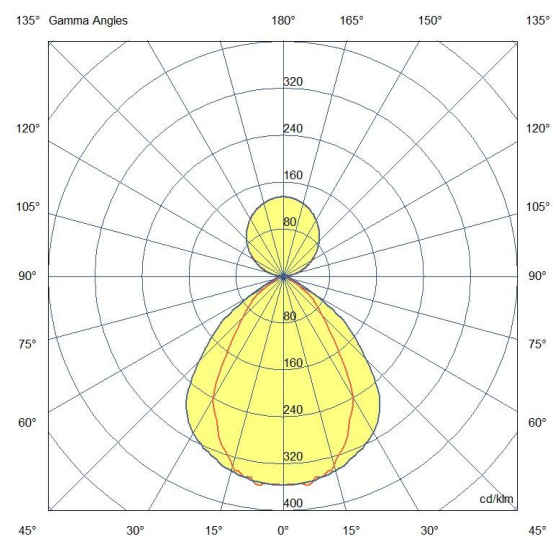

ASOLA LN14


LN14 - DIRECT/INDIRECT SUSPENDED LINEAR

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Lumen Output		Size		CCT		Dimming		Diffuser		Colour		Emergency	
LN14	-1	2323lm/m	-1135	1135mm	-3K	3000K	(Blank)	None	(Blank)	Opal	(Blank)	White	(Blank)	None
	-2	3177lm/m	-1415	1415mm	-4K	4000K	-DA	DALI	-M	MPRZ	-BLK	Black	-E	3hr
	-3	4402lm/m									-GRY	Grey	-EA	3hr Auto Test
	(lumens stated are for 4000K)												-ED	3hr DALI

DIMENSIONAL DIAGRAM

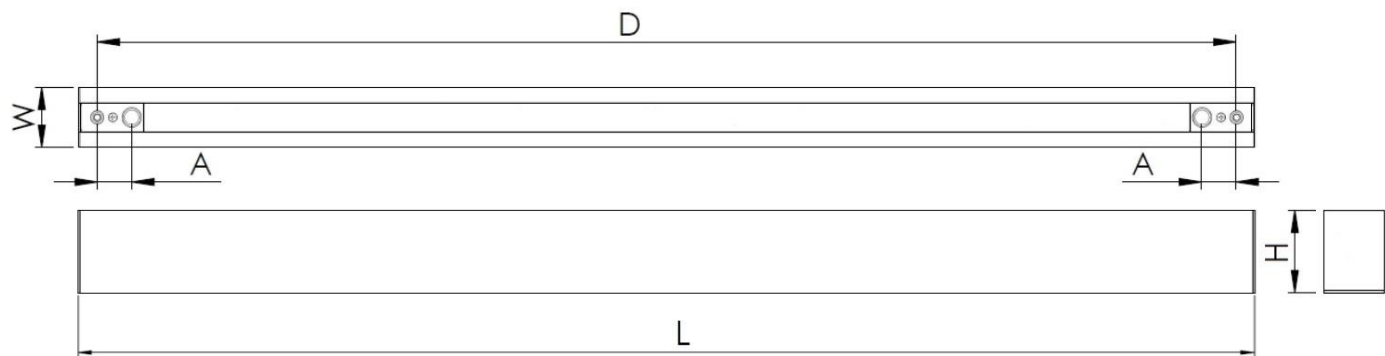

ASOLA LN14

LN14 - DIRECT/INDIRECT SUSPENDED LINEAR

