
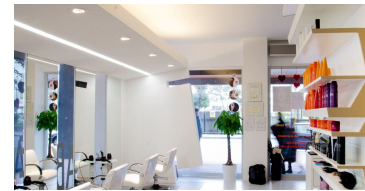


ASOLA LN38


LN38 - TRIMLESS RECESSED LINEAR

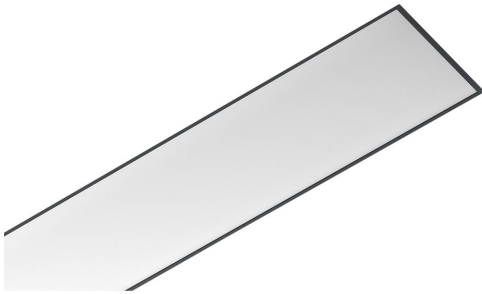

The Asola LN38 is a recessed trimless linear luminaire. This fitting can be produced with an opal or low-glare micro-linear prismatic diffuser. The Asola system can form a continuous line when using the in-line connection kits. Multiple lengths and outputs available with integrated sensor options. Through-wiring options and recessed fixing kits supplied. Available in black, grey, white or bespoke RAL colour.

PRODUCT SPECIFICATIONS

Wattage:	12W - 108W
Efficacy:	~183Lm/W
CCT:	3000K / 4000K
CRI:	>80
Driver Type:	Fixed Output / DALI
Construction:	Aluminium
Diffuser:	Opal / MPRZ
Colour:	Black / White / Grey
IP Rating:	IP40
Mounting:	Recessed
Light Source:	LED
IK Rating:	IK04
LED Lifetime:	75000/L80B50
SDCM:	3

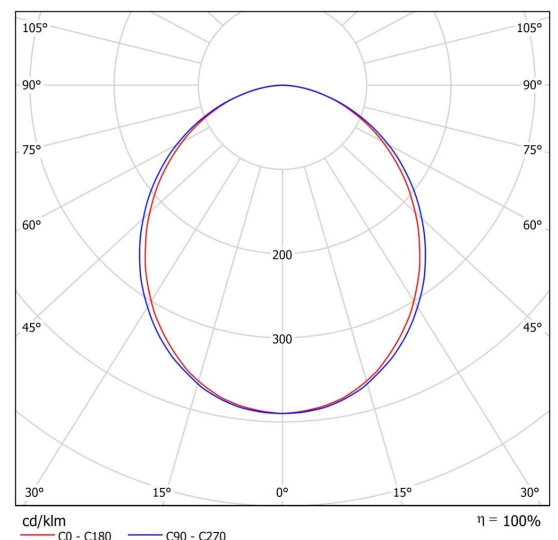

ASOLA LN38



LN38 - TRIMLESS RECESSED LINEAR

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Size		CCT		Dimming		Diffuser		Colour		Emergency
LN38	-570	570mm	-3K	3000K	(Blank)	None	(Blank)	Opal	(Blank)	White	(Blank) None
	-850	850mm	-4K	4000K	-DA	DALI	-M	MPRZ	-B	Black	-E 3hr
	-1130	1130mm							-G	Grey	-EA 3hr Auto Test
	-1410	1410mm									-ED 3hr DALI
	-1690	1690mm									
	-1970	1970mm									
	-2250	2250mm									
	-2530	2530mm									
	-2950	2950mm									

DIMENSIONAL DIAGRAM

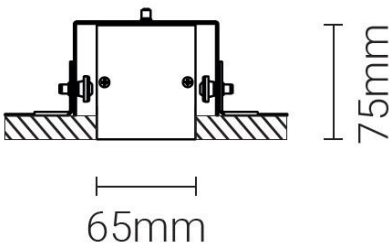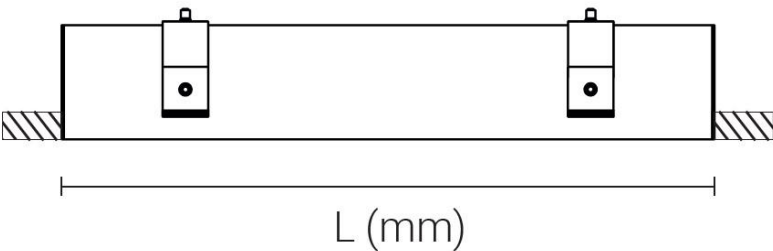

Lx65mm