


MARINA


PA9 - PANEL LUMINAIRE

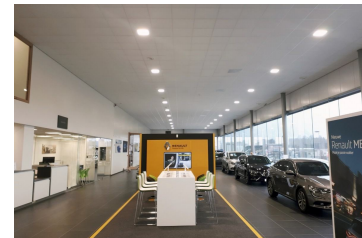

Recessed back-lit luminaire with high output options. Opal or UGR<19 micro-prismatic, UV stable diffuser options. Designed to be fitted to multiple 600x600mm ceiling grid types including SAS and Armstrong types. This fitting can also be mounted in a plasterboard ceiling using the recessed mounting kit. Tunable white options are available.

PRODUCT SPECIFICATIONS

Wattage:	33W / 39W / 58W
Efficacy:	~111lm/W
CCT:	3000K / 4000K / TW
CRI:	>80
Driver Type:	Fixed Output / DALI
Construction:	Steel Body
Diffuser:	Opal / MPRZ
Colour:	White
IP Rating:	IP40
IK Rating:	IK05
Mounting:	Recessed
Light Source:	LED
LED Lifetime:	100000/L80B50
SDCM:	3

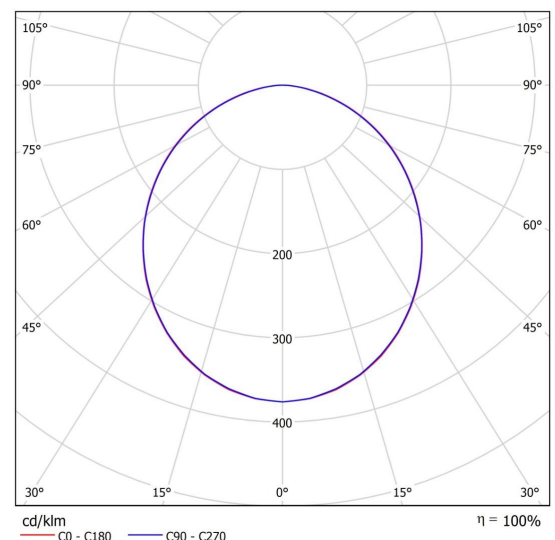

MARINA

PA9 - PANEL LUMINAIRE

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Power	Lumens	CCT	Diffuser	Dimming	Emergency
PA9	-33W	33W 4009lm	-3K 3000K	(Blank) Opal -M MPRZ	(Blank) None	(Blank) None
	-39W	39W 4630lm	-4K 4000K		-DA DALI	-E 3hr
	-58W	58W 6394lm	-TW Tuneable White			-EA 3hr Auto Test
	(lumens stated are for 4000K)					-ED 3hr DALI

DIMENSIONAL DIAGRAM

