

VACRI


PEN01 - PENDANT / SURFACE MOUNTED DOWNLIGHT



The Vacri downlight has been designed to be suspended or surface-mounted. Powder-coated aluminium body and silver faceted reflector. Deepened low-glare clear diffuser with beam angle and CRI options. Adaptor option available for suspending from track.

PRODUCT SPECIFICATIONS

Wattage:	13W / 19W / 27W
Efficacy:	~116Lm/W
CCT:	3000K / 4000K
CRI:	>80 / >90
Driver Type:	Fixed Output / DALI
Construction:	Aluminium Body
Diffuser:	Glass
Reflector:	Faceted Silver
Colour:	White
IP Rating:	IP20
IK Rating:	IK02
Mounting:	Suspended
Light Source:	LED
LED Lifetime:	70000/L80B50
SDCM:	3

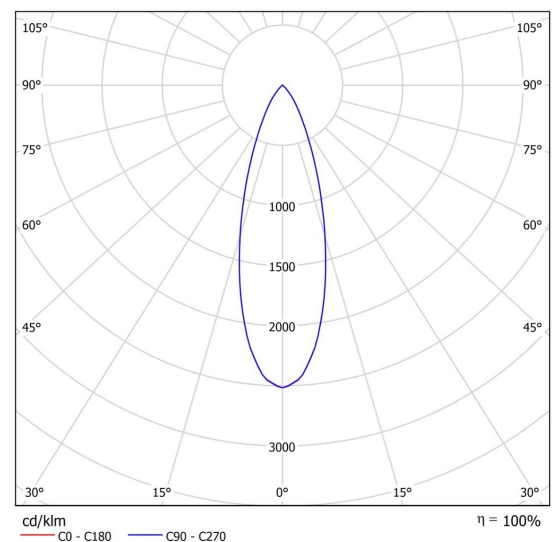

VACRI


PEN01 - PENDANT / SURFACE MOUNTED DOWNLIGHT

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Power		Lumens	CCT		CRI		Beam Angle		Dimming							
PEN01	-13W	13W	1683lm	-3K	3000K	(Blank)	80+	-24D	24 Degrees	(Blank)	None						
	-19W	19W	2336lm					-4K	4000K			-90	90	-40D	40 Degrees	-DA	DALI
	-27W	27W	3150lm					-60D	60 Degrees								
	(lumens stated are for 4000K)																

DIMENSIONAL DIAGRAM

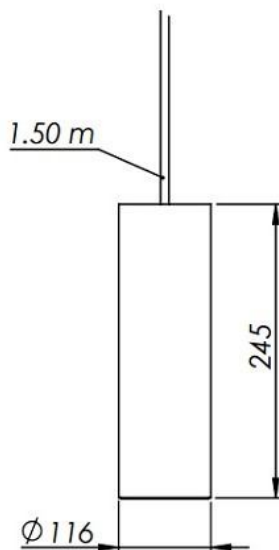

VACRI

PEN01 - PENDANT / SURFACE MOUNTED DOWNLIGHT

