

MARINA


PA32 - PANEL FOR SAS330 CEILING



The Marina SAS enables recessed integration with SAS330 ceilings. This fitting is a high performance back-lit panel with opal or prismatic diffuser options. Customised sizes are available for bespoke tile sizes. Optional 40 litres per second air vents. Dimming and emergency options available.

PRODUCT SPECIFICATIONS

Wattage:	22W / 26W / 41W
Efficacy:	~105Lm/W
CCT:	3000K / 4000K / TW
CRI:	>80
Driver Type:	Fixed Output / DALI
Construction:	Steel Body
Diffuser:	Opal / MPRZ
Colour:	White
IP Rating:	IP20
Mounting:	SAS330
Light Source:	LED
LED Lifetime:	100000/L80B50
SDCM:	3

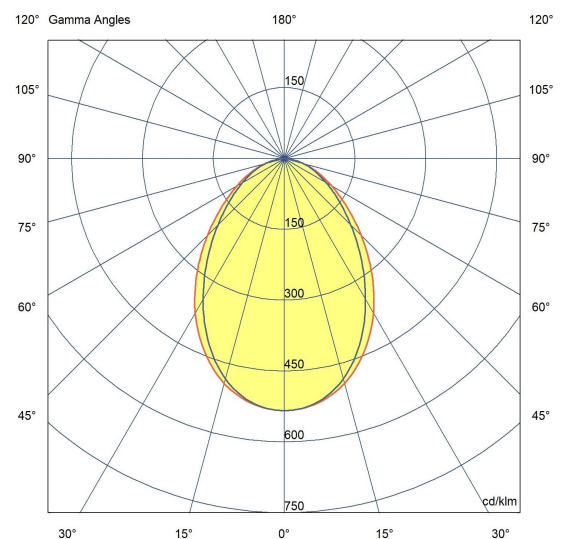

MARINA

PA32 - PANEL FOR SAS330 CEILING

CODING MATRIX

Use the **BOLD** characters to create your specified code:

Family	Size	Power	Lumens	CCT	Diffuser	Dimming	Air Vents	Emergency					
PA32	-1000	1000mm	-22W	22W	2464lm	-3K	3000K	(Blank)	Opal	(Blank)	None	(Blank)	None
	-1250	1250mm	-26W	26W	2600lm	-4K	4000K	-M	MPRZ	-DA	DALI	-V	Vents 40L/s
	-1350	1350mm	-41W	41W	4200lm	-TW	Tunable White						
				(lumens stated are for 4000K)									

*bespoke sizes available

DIMENSIONAL DIAGRAM

